



# Winstar Display Co., LTD

## 華凌光電股份有限公司



WEB: <http://www.winstar.com.tw>

E-mail: [winstar@winstar.com.tw](mailto:winstar@winstar.com.tw)

### SPECIFICATION

**CUSTOMER :** \_\_\_\_\_

**MODULE NO.:** WF52ATLASDNN0#

|   |  |
|---|--|
| <p><b>APPROVED BY:</b></p> <p>( FOR CUSTOMER USE ONLY )</p> | <p><b>PCB VERSION:</b> _____</p> <p><b>DATA:</b> _____</p> |
|---|--|

| SALES BY                       | APPROVED BY | CHECKED BY | PREPARED BY |
|--------------------------------|-------------|------------|-------------|
|                                |             |            | 葉虹蘭         |
| <b>ISSUED DATE: 2016/05/26</b> |             |            |             |

TFT Display Inspection Specification: <http://www.winstar.com.tw/service.php>



**RECORDS OF REVISION**

**DOC. FIRST ISSUE**

| VERSION | DATE       | REVISED<br>PAGE NO. | <b>SUMMARY</b> |
|---------|------------|---------------------|----------------|
| 0       | 2016/05/26 |                     | First issue    |

# Contents

- 1.Module Classification Information
- 2.Summary
- 3.General Specification
- 4.Absolute Maximum Ratings
- 5.Electrical Characteristics
- 6.DC Characteristics
- 7.AC Characteristics
- 8.Optical Characteristics
- 9.Interface
- 10.Block Diagram
- 11.Reliability
- 12.Contour Drawing
- 13.Display start address setting
- 14.Other

# 1.Module Classification Information

W F 52 A T L A S D N N 0 #  
 ① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨ ⑩ ⑪ ⑫ ⑬

|   |  |   |          |   |              |            |            |
|---|--|---|----------|---|--------------|------------|------------|
| ① | Brand : WINSTAR DISPLAY CORPORATION  |   |          |   |              |            |            |
| ② | Display Type : F→TFT Type, J→Custom TFT  |   |          |   |              |            |            |
| ③ | Display Size : 5.2" TFT  |   |          |   |              |            |            |
| ④ | Model serials no.  |   |          |   |              |            |            |
| ⑤ | Backlight Type :   | F→CCFL, White<br>S→LED, High Light White  |          |   | T→LED, White |            |            |
| ⑥ | LCD Polarize<br>Type/ Temperature<br>range/ Gray Scale<br>Inversion Direction  | C→Transmissive, N. T, 6:00 ; I→Transmissive, W. T, 6:00<br>F→Transmissive, N.T,12:00 ; L→Transmissive, W.T,12:00<br>N→Transmissive, Super W.T, 6:00<br>Q→Transmissive, Super W.T, 12:00<br>X→Transmissive, W.T, VA TFT<br>V→Transmissive, Super W.T, VA TFT<br>R→Transmissive, Super W.T, O-TFT<br>Z→Transmissive, W.T, O-TFT<br>A→Transmissive, N.T, IPS TFT<br>Y→Transmissive, W.T, IPS TFT |          |   |              |            |            |
| ⑦ | A : TFT LCD<br>B : TFT+FR+CONTROL BOARD<br>C : TFT+FR+A/D BOARD<br>D : TFT+FR+A/D BOARD+CONTROL BOARD<br>E : TFT+FR+POWER BOARD<br>F : TFT+CONTROL BOARD |   |          | G : TFT+FR<br>H : TFT+D/V BOARD<br>I : TFT+FR+D/V BOARD<br>J : TFT+POWER BD |              |            |            |
| ⑧ | Resolution:  |   |          |   |              |            |            |
|   | A: 128160  | B:320234  | C:320240 | D:480234  | E:480272     | F: 640480  | G: 800480  |
|   | H:1024600  | I:320480  | J:240320 | K:800600  | L:240400     | M :1024768 | P :1280800 |
|   | S:480128   | T:800320  |          |   |              |            |            |
| ⑨ | D: Digital L : LVDS  |   |          |   |              |            |            |
| ⑩ | Interface : N : without control board A : 8Bit B : 16Bit   |   |          |   |              |            |            |
| ⑪ | TS : N : Without TS T : resistive touch panel C : capacitive touch panel (G-F-F)<br>G : capacitive touch panel(G-G)                                      |   |          |   |              |            |            |
| ⑫ | Version  |   |          |   |              |            |            |
| ⑬ | Special Code   | #:Fit in with ROHS directive regulations  |          |   |              |            |            |

## **2.Summary**

This technical specification applies to 5.2' color TFT-LCD panel. The 5.2' color TFT-LCD panel is designed for camcorder, digital camera application and other electronic products which require high quality flat panel displays. This module follows RoHS.

### **3. General Specifications**

| <b>Item</b>                    | <b>Dimension</b>                  | <b>Unit</b> |
|--------------------------------|-----------------------------------|-------------|
| Size                           | 5.2                               | inch        |
| Dot Matrix                     | 480 x RGBx128                     | dots        |
| Module dimension               | 140.4 x 49.87 x 3.0               | mm          |
| Active area                    | 127.152 x 33.9072                 | mm          |
| Dot pitch                      | 0.0883 x 0.2649                   | mm          |
| LCD type                       | TFT, Normally White, Transmissive |             |
| View Direction                 | 6 o'clock                         |             |
| Gray Scale Inversion Direction | 12 o'clock                        |             |
| Backlight Type                 | LED, Normally White               |             |
| Driver IC                      | ST7252 Or Equal                   |             |
| Interface                      | RGB 24bit                         |             |
| With /Without TP               | Without TP                        |             |
| Surface                        | Glare                             |             |


\*Color tone slight changed by temperature and driving voltage.

# 4. Absolute Maximum Ratings

| Item                  | Symbol | Min | Typ | Max | Unit |
|-----------------------|--------|-----|-----|-----|------|
| Operating Temperature | TOP    | -20 | —   | +70 | °C   |
| Storage Temperature   | TST    | -30 | —   | +80 | °C   |

Note: Device is subject to be damaged permanently if stresses beyond those absolute maximum ratings listed above

1. Temp.  $\leq 60^{\circ}\text{C}$ , 90% RH MAX. Temp.  $> 60^{\circ}\text{C}$ , Absolute humidity shall be less than 90% RH at  $60^{\circ}\text{C}$

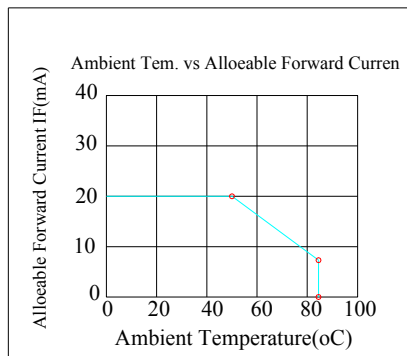

# 5. Electrical Characteristics

## 5.1. Operating conditions:

| Item                      | Symbol | Condition | Min | Typ | Max | Unit |
|---------------------------|--------|-----------|-----|-----|-----|------|
| Supply Voltage For Logic  | VDD    | —         | 3.0 | 3.3 | 3.6 | V    |
| Digital operation current | IDD    | -         | —   | 20  | —   | mA   |

## 5.2. LED driving conditions

| Parameter     | Symbol | Min. | Typ.   | Max. | Unit | Remark     |
|---------------|--------|------|--------|------|------|------------|
| LED current   |        | -    | 60     | -    | mA   |            |
| LED voltage   | VLED+  | 16.8 | 18.6   | 21   | V    | Note 1     |
| LED Life Time |        | -    | 50,000 | -    | Hr   | Note 2,3,4 |

Note 1 : There are 1 Groups LED



Note 2 : Ta = 25 °C

Note 3 : Brightness to be decreased to 50% of the initial value

Note 4 : The single LED lamp case



## 6.DC CHARATERISTICS


| Parameter                | Symbol   | Rating |     |        | Unit | Condition |
|--------------------------|----------|--------|-----|--------|------|-----------|
|                          |          | Min    | Typ | Max    |      |           |
| Low level input voltage  | $V_{IL}$ | 0      | -   | 0.3VDD | V    |           |
| High level input voltage | $V_{IH}$ | 0.7VDD | -   | VDD    | V    |           |

# 7.AC CHARACTERISTICS

Parallel SYNC mode RGB input timing table

| Item          | Symbol         | Min    | Typ | Max | Unit |      |
|---------------|----------------|--------|-----|-----|------|------|
| CLK frequency | Fclk           | 8      | 9   | 12  | MHz  |      |
| DCLK Period   | Tclk           | 83     | 111 | 125 | ns   |      |
| HSYNC         | Period Time    | Th     | 485 | 531 | 598  | DCLK |
|               | Display Period | Thdisp | -   | 480 | -    | DCLK |
|               | Back Porch     | Thbp   | 3   | 43  | 43   | DCLK |
|               | Front Porch    | Thfp   | 2   | 8   | 75   | DCLK |
|               | Pulse Width    | Thw    | 2   | 4   | 75   | DCLK |
| VSYNC         | Period Time    | Tv     | 276 | 292 | 321  | H    |
|               | Display Period | Tvdisp | -   | 272 | -    | H    |
|               | Back Porch     | Tvbp   | 2   | 12  | 12   | H    |
|               | Front Porch    | Tvfp   | 2   | 8   | 37   | H    |
|               | Pulse Width    | Tvw    | 2   | 4   | 37   | H    |

## 7.1. Timing Diagram

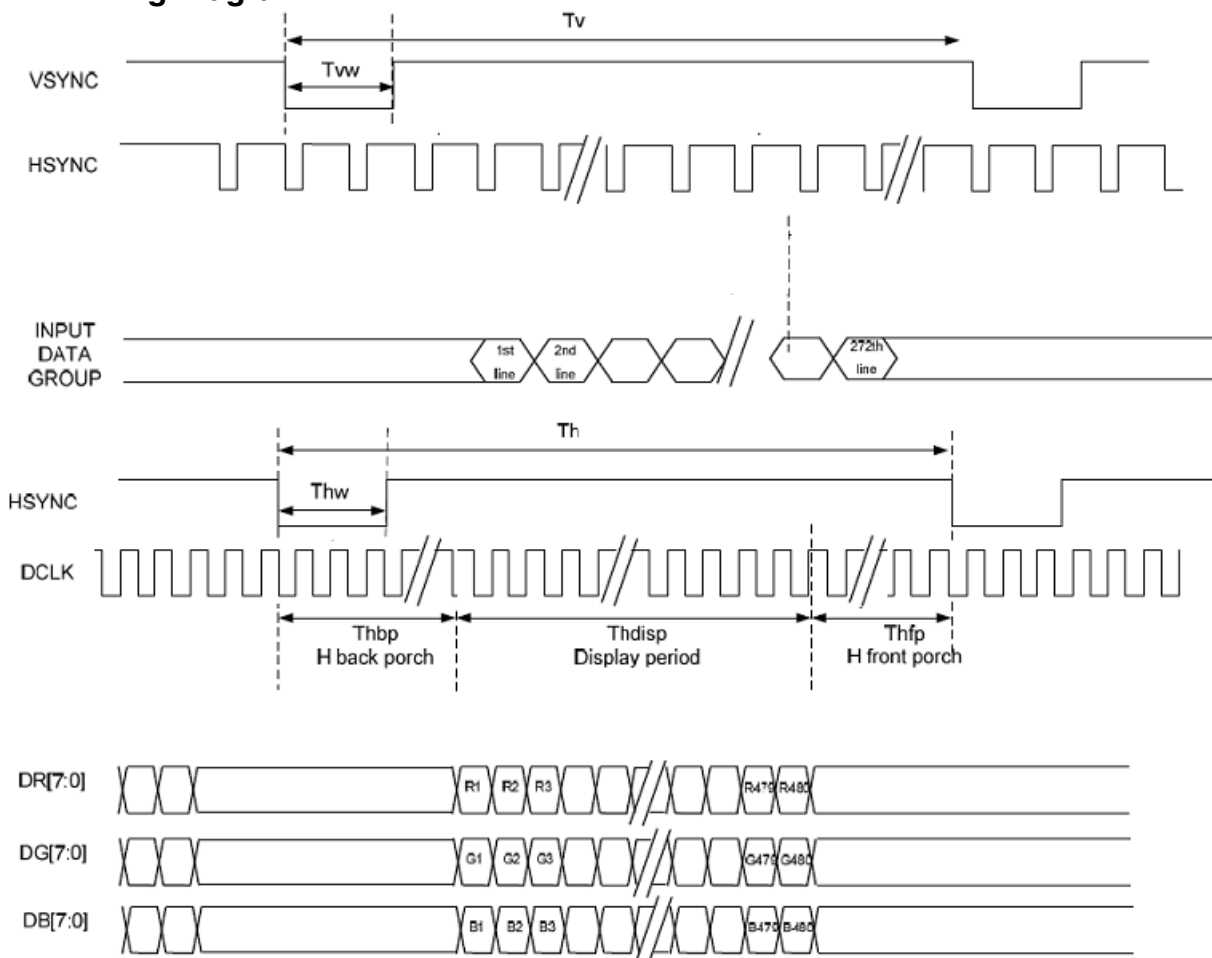

# 8. Optical Characteristics

| Item  | Symbol | Condition.                        | Min                         | Typ.  | Max.  | Unit              | Remark            |          |
|---|--------|-----------------------------------|-----------------------------|-------|-------|-------------------|-------------------|----------|
| Response time   | Tr+ Tf | $\theta=0^\circ$ 、 $\Phi=0^\circ$ | -                           | 35    | -     | .ms               | Note 3            |          |
| Contrast ratio  | CR     | At optimized viewing angle        | 300                         | 500   | -     | -                 | Note 4            |          |
| Color Chromaticity                                      | White  | Wx                                | $\theta=0^\circ$ 、 $\Phi=0$ | 0.294 | 0.314 | 0.334             |                   | Note 2,5 |
|   |        | Wy                                |                             | 0.325 | 0.345 | 0.365             |                   |          |
| Viewing angle<br>(Gray Scale<br>Inversion<br>Direction) | Hor.   | $\Theta_R$                        | $CR \geq 10$                | 55    | 65    | -                 | Deg.              | Note 1   |
|   |        | $\Theta_L$                        |                             | 55    | 65    | -                 |                   |          |
|   | Ver.   | $\Phi_T$                          |                             | 55    | 65    | -                 |                   |          |
|   |        | $\Phi_B$                          |                             | 45    | 55    | -                 |                   |          |
| Brightness  | -      | -                                 | 400                         | 500   | -     | cd/m <sup>2</sup> | Center of display |          |

Ta=25±2°C, IL=60mA

Note 1: Definition of viewing angle range

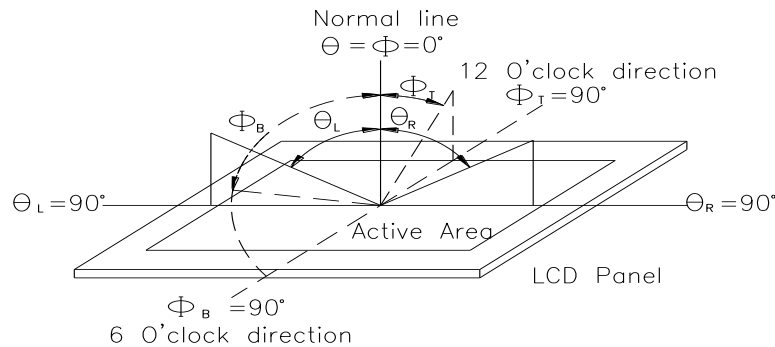


Fig.8.1. Definition of viewing angle

Note 2: Test equipment setup:

After stabilizing and leaving the panel alone at a driven temperature for 10 minutes, the measurement should be executed. Measurement should be executed in a stable, windless, and dark room. Optical specifications are measured by Topcon BM-7orBM-5 luminance meter 1.0° field of view at a distance of 50cm and normal direction.


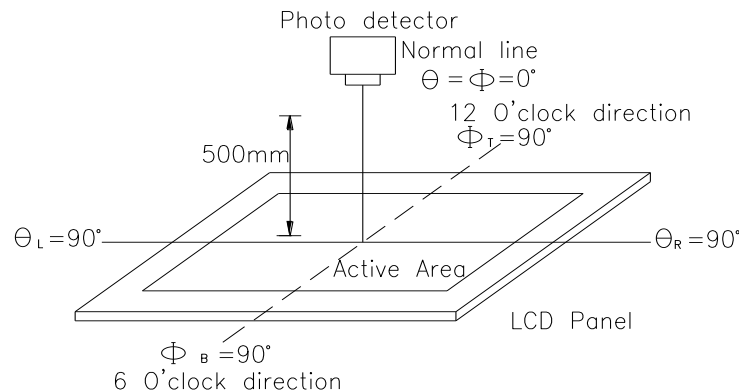


Fig. 8.2. Optical measurement system setup

**Note 3: Definition of Response time:**

The response time is defined as the LCD optical switching time interval between “White” state and “Black” state. Rise time,  $T_r$ , is the time between photo detector output intensity changed from 90% to 10%. And fall time,  $T_f$ , is the time between photo detector output intensity changed from 10% to 90%

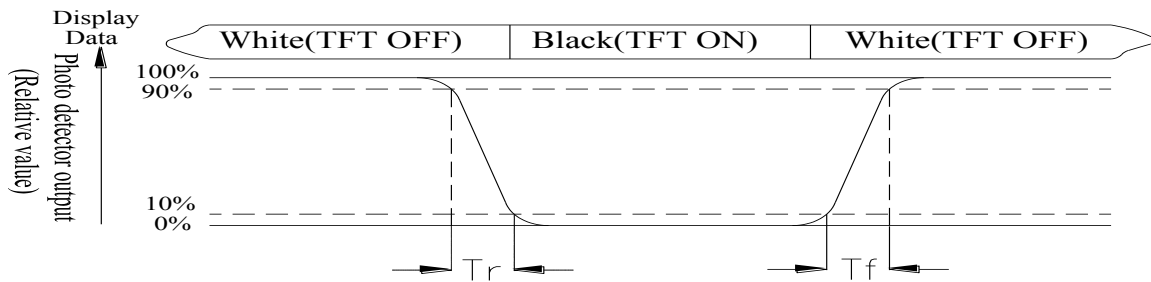

**Note 4: Definition of contrast ratio:**

The contrast ratio is defined as the following expression.

$$\text{Contrast ratio (CR)} = \frac{\text{Luminance measured when LCD on the "White" state}}{\text{Luminance measured when LCD on the "Black" state}}$$

Note 5: White  $V_i = V_{i50} \pm 1.5V$

Black  $V_i = V_{i50} \pm 2.0V$

“±” means that the analog input signal swings in phase with VCOM signal.

“±” means that the analog input signal swings out of phase with VCOM signal.

The 100% transmission is defined as the transmission of LCD panel when all the input terminals of module are electrically opened.

Note 6: Definition of color chromaticity (CIE 1931)

Color coordinates measured at the center point of LCD

Note 7: Measured at the center area of the panel when all the input terminals of LCD panel are electrically opened.

# 9.Interface


## 9.1. LCM PIN Definition

| Pin | Symbol | Function                                  | Remark  |
|-----|--------|---|---------|
| 1   | VLED-  | Power for LED backlight cathode           |         |
| 2   | VLED+  | Power for LED backlight anode             |         |
| 3   | GND    | Power ground                              |         |
| 4   | VCC    | Power voltage                             |         |
| 5   | R0     | Red data (LSB)                            |         |
| 6   | R1     | Red data                                  |         |
| 7   | R2     | Red data                                  |         |
| 8   | R3     | Red data                                  |         |
| 9   | R4     | Red data                                  |         |
| 10  | R5     | Red data                                  |         |
| 11  | R6     | Red data                                  |         |
| 12  | R7     | Red data (MSB)                            |         |
| 13  | G0     | Green data (LSB)                          |         |
| 14  | G1     | Green data                                |         |
| 15  | G2     | Green data                                |         |
| 16  | G3     | Green data                                |         |
| 17  | G4     | Green data                                |         |
| 18  | G5     | Green data                                |         |
| 19  | G6     | Green data                                |         |
| 20  | G7     | Green data (MSB)                          |         |
| 21  | B0     | Blue data (LSB)                           |         |
| 22  | B1     | Blue data                                 |         |
| 23  | B2     | Blue data                                 |         |
| 24  | B3     | Blue data                                 |         |
| 25  | B4     | Blue data                                 |         |
| 26  | B5     | Blue data                                 |         |
| 27  | B6     | Blue data                                 |         |
| 28  | B7     | Blue data (MSB)                           |         |
| 29  | GND    | Power ground                              |         |
| 30  | CLK    | Pixel clock (DCLK)                        |         |
| 31  | LR     | Right /Left selection; Default R/L=High   | Note1,2 |
| 32  | HSYNC  | Horizontal sync signal; negative polarity |         |
| 33  | VSYNC  | Vertical sync signal; negative polarity   |         |
| 34  | NC     | No connection                             |         |
| 35  | UD     | Up/down selection; Default U/D=High       | Note1,2 |
| 36  | RESET  | Reset signal                              |         |
| 37  | NC     | No connection                             |         |
| 38  | NC     | No connection                             |         |
| 39  | NC     | No connection                             |         |
| 40  | NC     | No connection                             |         |

Note 1: Selection of scanning mode


| Setting of scan control input |     | Scanning direction        |
|-------------------------------|-----|---------------------------|
| UD                            | LR  |                           |
| GND                           | VCC | Down to up, left to right |
| VCC                           | GND | Up to down, right to left |
| GND                           | GND | Down to up, right to left |
| VCC                           | VCC | Up to down, left to right |

Note 2: Definition of scanning direction. Refer to the figure as below:

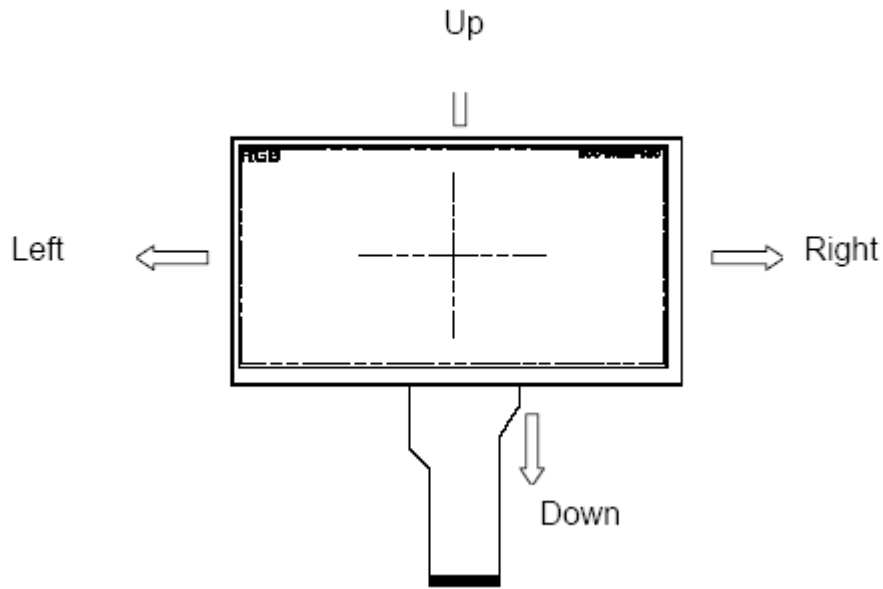

# 10. Block Diagram

## LCD Panel

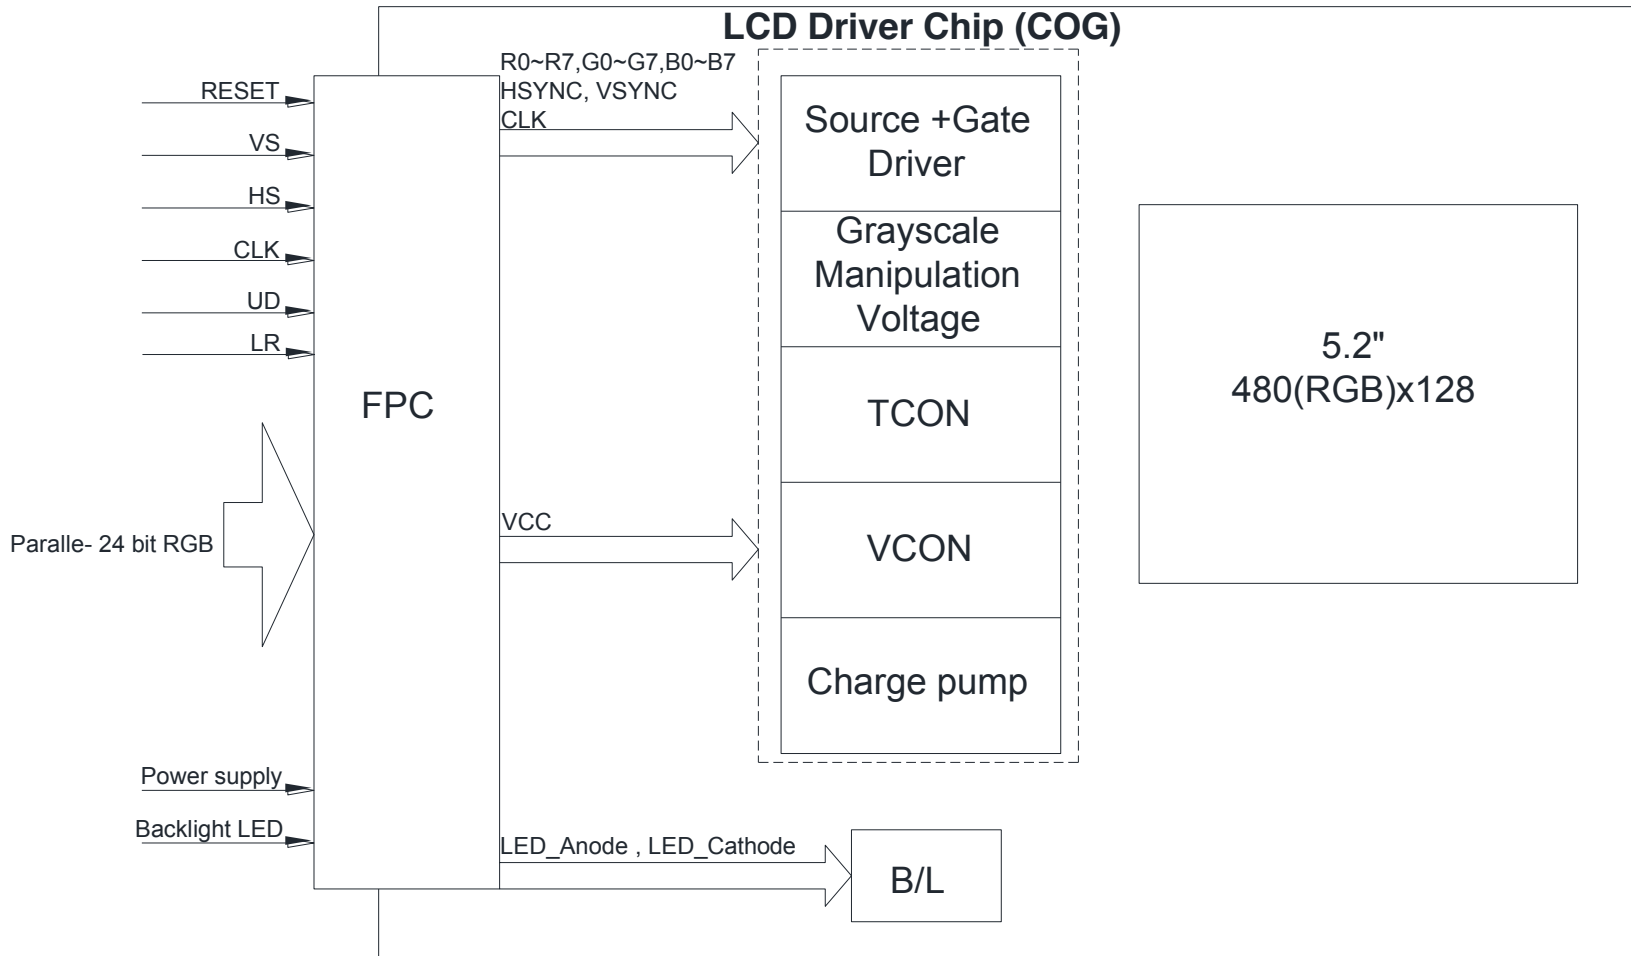

# 11. Reliability

Content of Reliability Test (Wide temperature, -20°C~70°C)

| Environmental Test                   |   |  |      |
|--------------------------------------|---|--|------|
| Test Item                            | Content of Test   | Test Condition   | Note |
| High Temperature storage             | Endurance test applying the high storage temperature for a long time.   | 80°C<br>200hrs   | 2    |
| Low Temperature storage              | Endurance test applying the low storage temperature for a long time.  | -30°C<br>200hrs  | 1,2  |
| High Temperature Operation           | Endurance test applying the electric stress (Voltage & Current) and the thermal stress to the element for a long time.  | 70°C<br>200hrs   | —    |
| Low Temperature Operation            | Endurance test applying the electric stress under low temperature for a long time.  | -20°C<br>200hrs  | 1    |
| High Temperature/ Humidity Operation | The module should be allowed to stand at 60 °C,90%RH max  | 60°C,90%RH<br>96hrs  | 1,2  |
| Thermal shock resistance             | The sample should be allowed stand the following 10 cycles of operation<br><div style="text-align: center;"> <p style="margin-left: 100px;">-20°C    25°C    70°C</p> <p style="margin-left: 100px;">30min    5min    30min</p> <p style="margin-left: 100px;">1 cycle</p> </div> | -20°C /70°C<br>10 cycles   | —    |
| Vibration test                       | Endurance test applying the vibration during transportation and using.  | Total fixed amplitude : 15mm<br>Vibration Frequency : 10~55Hz<br>One cycle 60 seconds to 3 directions of X,Y,Z for Each 15 minutes | 3    |
| Static electricity test              | Endurance test applying the electric stress to the terminal.  | VS=±600V(contact),<br>±800v(air),<br>RS=330Ω<br>CS=150pF<br>10 times   | —    |


Note1: No dew condensation to be observed.

Note2: The function test shall be conducted after 4 hours storage at the normal Temperature and humidity after remove from the test chamber.


Note3: The packing have to including into the vibration testing.



# 12. Contour Drawing

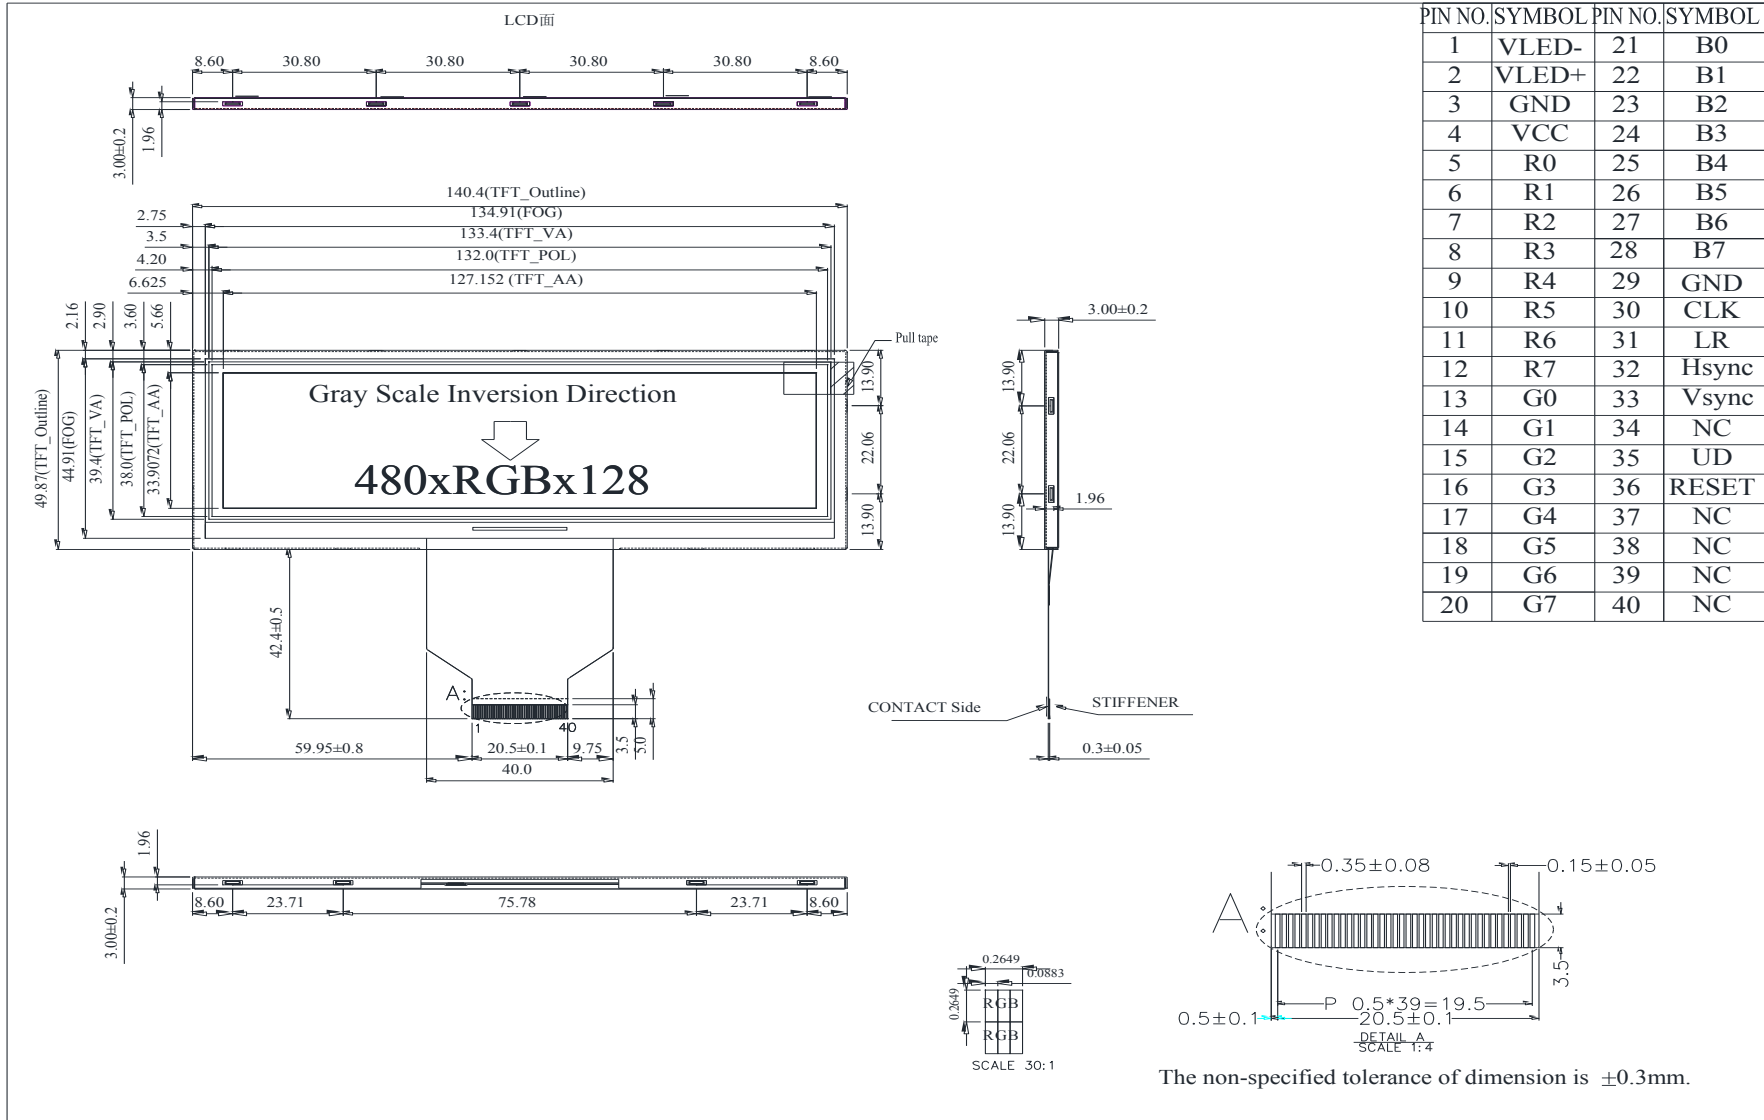

# 13.Display start address setting

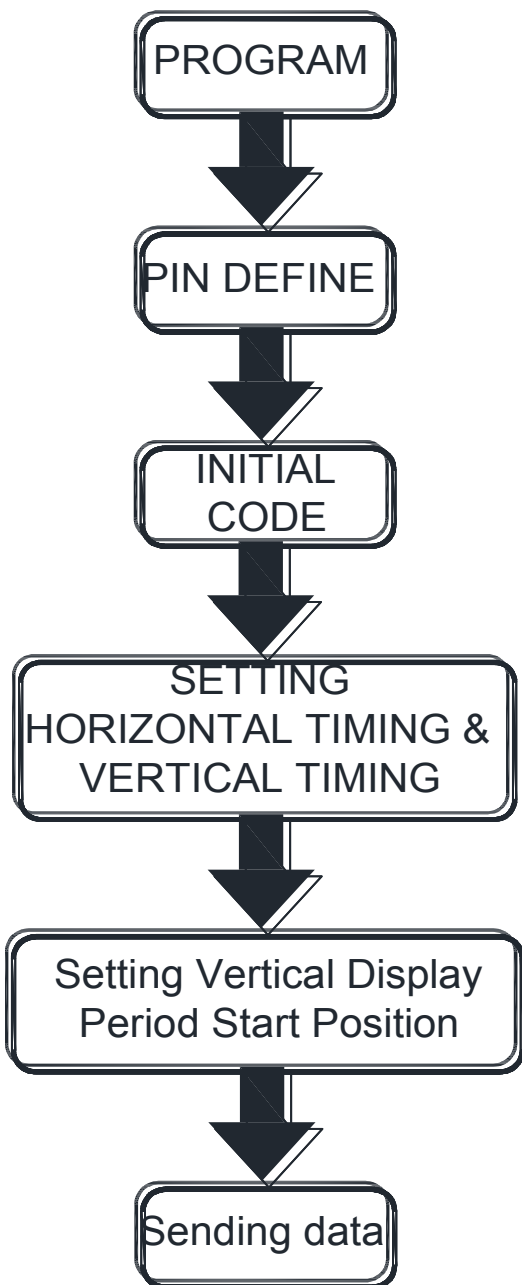

Ex.

One horizontal line=0x0213

VS period time=0x0124

HS Blanking=0x2b

VS Blanking=0x10

HS Front Porch=0x05

VS Front Porch=0x08

Suggestion :

Vertical Display Period

Start Position=0x44

Note :

For different Controller ICs, the value of vertical display period start position need to be adjusted accordingly.



**1、Panel Specification :**

- 1. Panel Type :  Pass  NG , \_\_\_\_\_
- 2. View Direction :  Pass  NG , \_\_\_\_\_
- 3. Numbers of Dots :  Pass  NG , \_\_\_\_\_
- 4. View Area :  Pass  NG , \_\_\_\_\_
- 5. Active Area :  Pass  NG , \_\_\_\_\_
- 6. Operating Temperature :  Pass  NG , \_\_\_\_\_
- 7. Storage Temperature :  Pass  NG , \_\_\_\_\_
- 8. Others : \_\_\_\_\_

**2、Mechanical Specification :**

- 1. PCB Size :  Pass  NG , \_\_\_\_\_
- 2. Frame Size :  Pass  NG , \_\_\_\_\_
- 3. Material of Frame :  Pass  NG , \_\_\_\_\_
- 4. Connector Position :  Pass  NG , \_\_\_\_\_
- 5. Fix Hole Position :  Pass  NG , \_\_\_\_\_
- 6. Backlight Position :  Pass  NG , \_\_\_\_\_
- 7. Thickness of PCB :  Pass  NG , \_\_\_\_\_
- 8. Height of Frame to PCB :  Pass  NG , \_\_\_\_\_
- 9. Height of Module :  Pass  NG , \_\_\_\_\_
- 10. Others :  Pass  NG , \_\_\_\_\_

**3、Relative Hole Size :**

- 1. Pitch of Connector :  Pass  NG , \_\_\_\_\_
- 2. Hole size of Connector :  Pass  NG , \_\_\_\_\_
- 3. Mounting Hole size :  Pass  NG , \_\_\_\_\_
- 4. Mounting Hole Type :  Pass  NG , \_\_\_\_\_
- 5. Others :  Pass  NG , \_\_\_\_\_

**4、Backlight Specification :**

- 1. B/L Type :  Pass  NG , \_\_\_\_\_
- 2. B/L Color :  Pass  NG , \_\_\_\_\_
- 3. B/L Driving Voltage (Reference for LED Type) :  Pass  NG , \_\_\_\_\_
- 4. B/L Driving Current :  Pass  NG , \_\_\_\_\_
- 5. Brightness of B/L :  Pass  NG , \_\_\_\_\_
- 6. B/L Solder Method :  Pass  NG , \_\_\_\_\_
- 7. Others :  Pass  NG , \_\_\_\_\_

>> **Go to page 2** <<



Winstar      Module Number : \_\_\_\_\_

Page: 2

**5、Electronic Characteristics of Module :**

- |                              |                               |                                     |
|------------------------------|-------------------------------|-------------------------------------|
| 1. Input Voltage :           | <input type="checkbox"/> Pass | <input type="checkbox"/> NG , _____ |
| 2. Supply Current :          | <input type="checkbox"/> Pass | <input type="checkbox"/> NG , _____ |
| 3. Driving Voltage for LCD : | <input type="checkbox"/> Pass | <input type="checkbox"/> NG , _____ |
| 4. Contrast for LCD :        | <input type="checkbox"/> Pass | <input type="checkbox"/> NG , _____ |
| 5. B/L Driving Method :      | <input type="checkbox"/> Pass | <input type="checkbox"/> NG , _____ |
| 6. Negative Voltage Output : | <input type="checkbox"/> Pass | <input type="checkbox"/> NG , _____ |
| 7. Interface Function :      | <input type="checkbox"/> Pass | <input type="checkbox"/> NG , _____ |
| 8. LCD Uniformity :          | <input type="checkbox"/> Pass | <input type="checkbox"/> NG , _____ |
| 9. ESD test :                | <input type="checkbox"/> Pass | <input type="checkbox"/> NG , _____ |
| 10. Others :                 | <input type="checkbox"/> Pass | <input type="checkbox"/> NG , _____ |

**6、Summary :**

Sales signature : \_\_\_\_\_

Customer Signature : \_\_\_\_\_

Date :      /      /      \_\_\_\_\_